


TYPICAL LET-IN WALL BRACING.


EXTERIOR WALLS OF ONE STORY WOOD FRAME BUILDINGS SHALL BE CONSTRUCTED WITH STUDS NOT LESS THAN 2x4 SPACED NOT MORE THAN 24" OC, SUPPORTING ROOF AND CEILING ONLY WITH MAXIMUM HEIGHT OF 10'.

THE EXTERIOR SIDE OF ALL EXTERIOR WALLS SHALL BE BRACED AT EACH END OF CORNERS AND EVERY 25' MAXIMUM

WHERE BRACING PANELS CANNOT BE UTILIZED DUE TO OPENINGS, PROVIDE MINIMUM 3/8" PLYWOOD SHEATHING FROM THE CORNER TO 4' BEYOND THE WALL OPENING OR THE NEXT CORNER

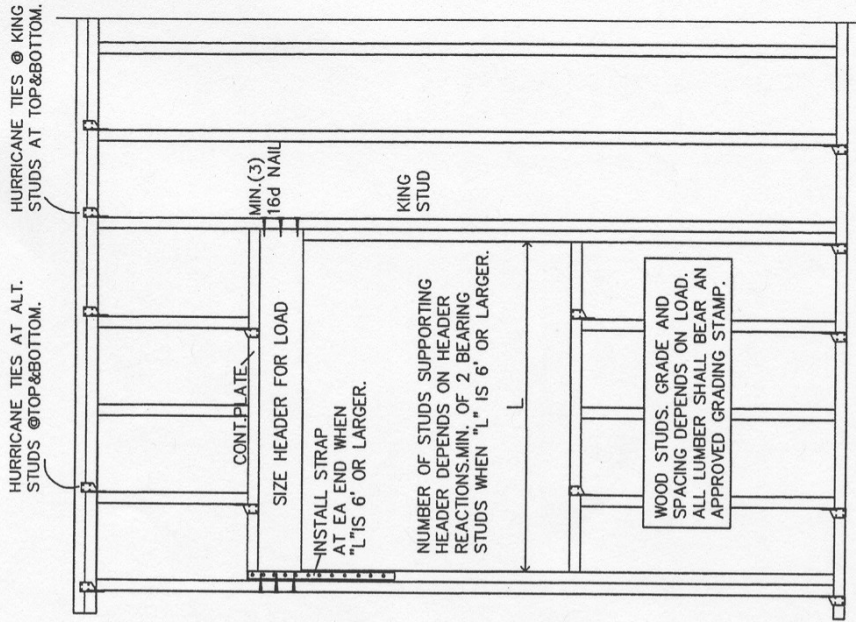

TYPICAL HEADER IN WOOD STUD WALL

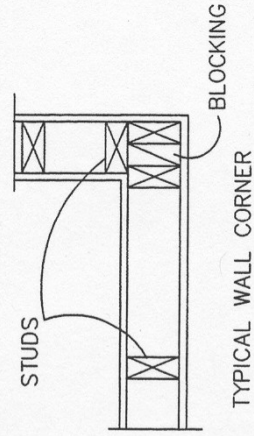

TYPICAL WALL FRAMING