





3" X ½"
LETTERING

2½" X ½"
LETTERING

1 ½ " X ½"
LETTERING










3" X X"
LETTERING

2X" X X"
LETTERING

1 \(\frac{5}{16} \) " X \(\frac{9}{32} \)"
LETTERING






F.D.C. SIGN DETAILS

WHITE REFLECTIVE BACKGROUND RED TRANSPARENT FILM

- THE SIGN FACE SHALL BE 12" X12" AND FABRICATED FROM .080 ALUMINUM SHEET WITH 1½" RADIUS CORNERS.
- 2. FONT STYLE USED IS HANDEL GOTHIC BT CAPITAL FONTS
- THE SIGN FACE SHALL HAVE A WHITE 3M DIAMOND GRADE REFLECTIVE SHEETING (DG³ 4090 SERIES OR EQUIVALENT) APPLIED AS A BACKGROUND TO THE ALUMINUM PLATES.
- 4. LETTERING / GRAPHICS SHALL BE DONE ONE OF THE FOLLOWING WAYS:
 - A. 3M SCOTCHLITE ACRYLIC, TRANSPARENT, ELECTRONIC CUTTABLE FILM (RED 1172 SERIES) INVERSE CUT TO ALLOW WHITE REFLECTIVE BACKGROUND TO SHOW THROUGH.
 - B. SCREEN PRINTED USING 3M 880I OR 880-00 SERIES TRAFFIC SIGN RED TRANSLUCENT INK.
 - BOTH PROCESSES (A OR B) WILL ACCOMPLISH A RED FIELD WITH WHITE COPY.
- ALL SIGN IMAGING SHALL BE IN COMPLIANCE WITH THE REFLECTIVE SHEETING MANUFACTURES MATCH COMPONENT SYSTEM.
- 6. TO BE INSTALLED ON THE WALL 5 7 FEET ABOVE GRADE OVER F.D.C. VALVE.




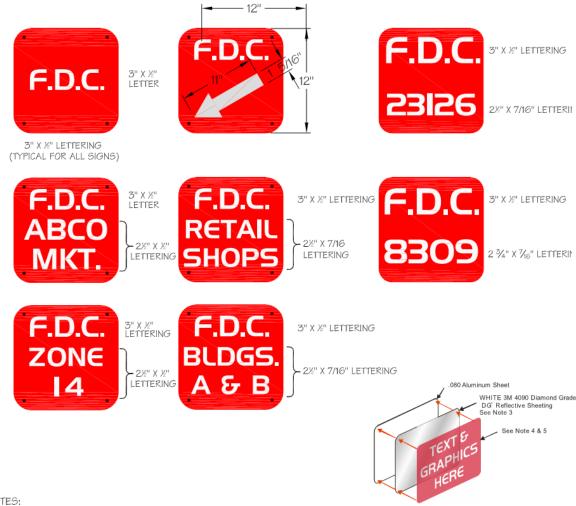

- THE SIGN FACE SHALL BE 12" X12" AND FABRICATED FROM .080 ALUMINUM SHEET WITH 11/2" RADIUS CORNERS.
- FONT STYLE USED IS HANDEL GOTHIC BT CAPITAL FONTS ADDITIONAL KERNING BETWEEN LETTERS AS SHOWN.
- THE SIGN FACE SHALL HAVE A WHITE 3M DIAMOND GRADE REFLECTIVE SHEETING (DG3 4090 SERIES OR EQUIVALENT) APPLIED AS A BACKGROUND TO THE ALUMINUM PLATES.
- LETTERING / GRAPHICS SHALL BE DONE ONE OF THE FOLLOWING WAYS:
 - A. 3M SCOTCHLITE ACRYLIC, TRANSPARENT, ELECTRONIC CUTTABLE FILM (RED 1172 SERIES) INVERSE CUT TO ALLOW WHITE REFLECTIVE BACKGROUND TO SHOW THROUGH.
 - B. SCREEN PRINTED USING 3M 880 I OR 880-00 SERIES TRAFFIC SIGN RED TRANSLUCENT INK.
- BOTH PROCESSES (A OR B) WILL ACCOMPLISH A RED FIELD WITH WHITE COPY.
- ALL SIGN IMAGING SHALL BE IN COMPLIANCE WITH THE REFLECTIVE SHEETING MANUFACTURES MATCH COMPONENT SYSTEM.
- 6. TO BE INSTALLED ON THE WALL 7 FEET ABOVE GRADE OVER F.D.C. VALVE.














3" X ½" LETTERING

2½" X 7/16" LETTERING






NOTES:

- THE SIGN FACE SHALL BE 12" X 12" AND FABRICATED FROM .080 ALUMINUM SHEET WITH 1½" RADIUS CORNERS.
- 2. FONT STYLE USED IS HANDEL GOTHIC BT CAPITAL FONTS
- THE SIGN FACE SHALL HAVE A WHITE 3M DIAMOND GRADE REFLECTIVE SHEETING (DG³ 4090 SERIES OR EQUIVALENT) APPLIED AS A BACKGROUND TO THE ALUMINUM PLATES.
- 4. LETTERING / GRAPHICS SHALL BE DONE ONE OF THE FOLLOWING WAYS:
 - A. 3M SCOTCHLITE ACRYLIC, TRANSPARENT, ELECTRONIC CUTTABLE FILM, (BROWN 1179 SERIES) INVERSE CUT TO ALLOW WHITE REFLECTIVE BACKGROUND TO SHOW THROUGH.
 - B. SCREEN PRINTED USING 3M 880I OR 880-00 SERIES TRAFFIC SIGN BROWN TRANSLUCENT INK.

BOTH PROCESSES (A OR B) WILL ACCOMPLISH A DARK FIELD WITH WHITE COPY.



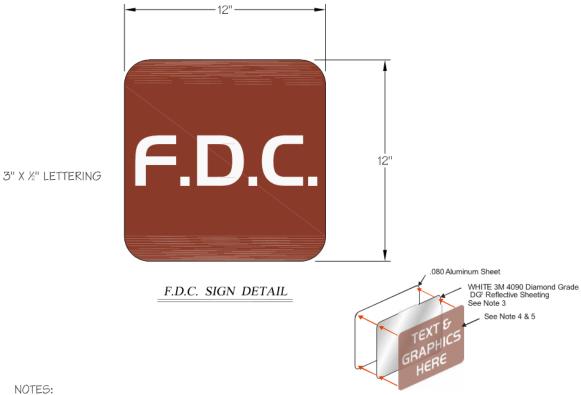


- THE SIGN FACE SHALL BE 12" X 12" AND FABRICATED FROM .080 ALUMINUM SHEET WITH 1½" RADIUS CORNERS.
- 2. FONT STYLE USED IS HANDEL GOTHIC BT CAPITAL FONTS
- 3. THE SIGN FACE SHALL HAVE A WHITE 3M DIAMOND GRADE REFLECTIVE SHEETING ($\overline{DG^3}$ 4090 SERIES OR EQUIVALENT) APPLIED AS A BACKGROUND TO THE ALUMINUM PLATES.
- 4. LETTERING / GRAPHICS SHALL BE DONE ONE OF THE FOLLOWING WAYS:
 - A. 3M SCOTCHLITE ACRYLIC, TRANSPARENT, ELECTRONIC CUTTABLE FILM, (BROWN 1179 SERIES) INVERSE CUT TO ALLOW WHITE REFLECTIVE BACKGROUND TO SHOW THROUGH.
 - B. SCREEN PRINTED USING 3M 880I OR 880-00 SERIES TRAFFIC SIGN BROWN TRANSLUCENT INK.

BOTH PROCESSES (A OR B) WILL ACCOMPLISH A DARK FIELD WITH WHITE COPY.













3" X ½" LETTERING

2½" X 7/16" LETTERING






NOTES:

- THE SIGN FACE SHALL BE 12" X 12" AND FABRICATED FROM .080 ALUMINUM SHEET WITH 1½" RADIUS CORNERS.
- 2. FONT STYLE USED IS HANDEL GOTHIC BT CAPITAL FONTS
- THE SIGN FACE SHALL HAVE A WHITE 3M DIAMOND GRADE REFLECTIVE SHEETING (DG³ 4090 SERIES OR EQUIVALENT) APPLIED AS A BACKGROUND TO THE ALUMINUM PLATES.
- 4. LETTERING / GRAPHICS SHALL BE DONE ONE OF THE FOLLOWING WAYS:
 - A. 3M SCOTCHLITE ACRYLIC, TRANSPARENT, ELECTRONIC CUTTABLE FILM, (GREEN 1177 SERIES) INVERSE CUT TO ALLOW WHITE REFLECTIVE BACKGROUND TO SHOW THROUGH.
 - B. SCREEN PRINTED USING 3M 880I OR 880-00 SERIES TRAFFIC SIGN GREEN TRANSLUCENT INK.

BOTH PROCESSES (A OR B) WILL ACCOMPLISH A DARK FIELD WITH WHITE COPY.



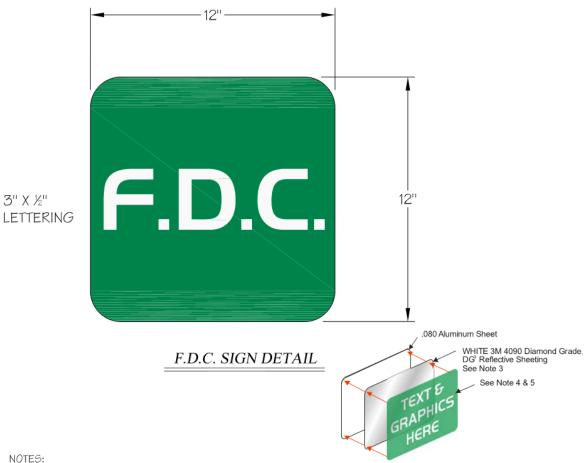

- 1. THE SIGN FACE SHALL BE 12" X 12" AND FABRICATED FROM .080 ALUMINUM SHEET WITH 1½" RADIUS CORNERS.
- 2. FONT STYLE USED IS HANDEL GOTHIC BT CAPITAL FONTS
- 3. THE SIGN FACE SHALL HAVE A WHITE 3M DIAMOND GRADE REFLECTIVE SHEETING (DG3 4090 SERIES OR EQUIVALENT) APPLIED AS A BACKGROUND TO THE ALUMINUM PLATES.
- 4. LETTERING / GRAPHICS SHALL BE DONE ONE OF THE FOLLOWING WAYS:
 - A. 3M SCOTCHLITE ACRYLIC, TRANSPARENT, ELECTRONIC CUTTABLE FILM, (GREEN 1177 SERIES) INVERSE CUT TO ALLOW WHITE REFLECTIVE BACKGROUND TO SHOW
 - B. SCREEN PRINTED USING 3M 880I OR 880-00 SERIES TRAFFIC SIGN GREEN TRANSLUCENT

BOTH PROCESSES (A OR B) WILL ACCOMPLISH A DARK FIELD WITH WHITE COPY.






1%6" LETTERING 3%" STROKE

> 2" LETTERING 3/8" STROKE

1/16" LETTERING 1/8" STROKE








- THE SIGN FACE SHALL BE 12" X 12" AND FABRICATED FROM .080 ALUMINUM SHEET WITH 1½" RADIUS CORNERS.
- 2. FONT STYLE USED IS HANDEL GOTHIC BT CAPITAL FONTS
- THE SIGN FACE SHALL HAVE A WHITE 3M DIAMOND GRADE REFLECTIVE SHEETING (DG³ 4090 SERIES OR EQUIVALENT) APPLIED AS A BACKGROUND TO THE ALUMINUM PLATES.
- LETTERING / GRAPHICS SHALL BE DONE ONE OF THE FOLLOWING WAYS:
 - A. 3M SCOTCHLITE ACRYLIC, TRANSPARENT, ELECTRONIC CUTTABLE FILM, (GREEN 1177 SERIES) INVERSE CUT TO ALLOW WHITE REFLECTIVE BACKGROUND TO SHOW THROUGH.
 - B. SCREEN PRINTED USING 3M 880I OR 880-00 SERIES TRAFFIC SIGN GREEN TRANSLUCENT INK.
 - BOTH PROCESSES (A OR B) WILL ACCOMPLISH A DARK FIELD WITH WHITE COPY.
- ALL SIGN IMAGING SHALL BE IN COMPLIANCE WITH THE REFLECTIVE SHEETING MANUFACTURES MATCH COMPONENT SYSTEM.



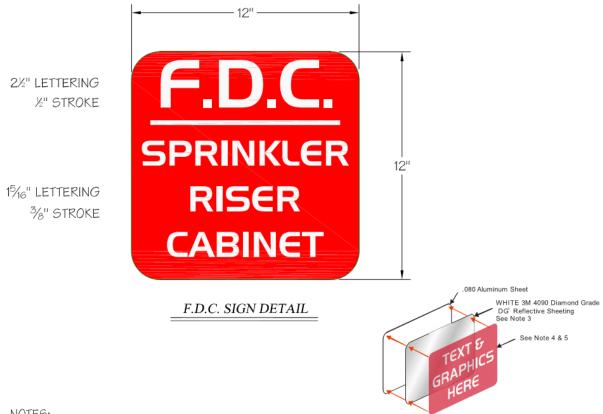


NOTES:

- 1. THE SIGN FACE SHALL BE 12" X 12" AND FABRICATED FROM .080 ALUMINUM SHEET WITH 1/2" RADIUS CORNERS.
- 2. FONT STYLE USED IS HANDEL GOTHIC BT CAPITAL FONTS
- 3. THE SIGN FACE SHALL HAVE A WHITE 3M DIAMOND GRADE REFLECTIVE SHEETING (DG3 4090 SERIES OR EQUIVALENT) APPLIED AS A BACKGROUND TO THE ALUMINUM PLATES.
- 4. LETTERING / GRAPHICS SHALL BE DONE ONE OF THE FOLLOWING WAYS:
 - A. 3M SCOTCHLITE ACRYLIC, TRANSPARENT, ELECTRONIC CUTTABLE FILM, (RED 1172 SERIES) INVERSE CUT TO ALLOW WHITE REFLECTIVE BACKGROUND TO SHOW THROUGH.
 - B. SCREEN PRINTED USING 3M 880I OR 880-00 SERIES TRAFFIC SIGN RED TRANSLUCENT INK.

BOTH PROCESSES (A OR B) WILL ACCOMPLISH A RED FIELD WITH WHITE COPY.



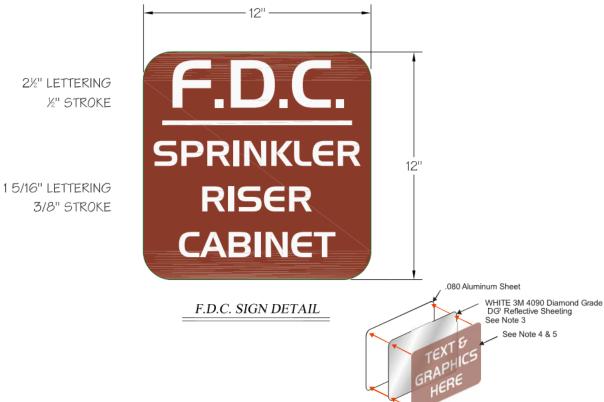


NOTES:

- THE SIGN FACE SHALL BE 12" X 12" AND FABRICATED FROM .080 ALUMINUM SHEET WITH 1½" RADIUS CORNERS.
- 2. FONT STYLE USED IS HANDEL GOTHIC BT CAPITAL FONTS
- THE SIGN FACE SHALL HAVE A WHITE 3M DIAMOND GRADE REFLECTIVE SHEETING (DG³ 4090 SERIES OR EQUIVALENT) APPLIED AS A BACKGROUND TO THE ALUMINUM PLATES.
- 4. LETTERING / GRAPHICS SHALL BE DONE ONE OF THE FOLLOWING WAYS:
 - A. 3M SCOTCHLITE ACRYLIC, TRANSPARENT, ELECTRONIC CUTTABLE FILM, (BROWN 1179 SERIES) INVERSE CUT TO ALLOW WHITE REFLECTIVE BACKGROUND TO SHOW THROUGH.
 - B. SCREEN PRINTED USING 3M 880I OR 880-00 SERIES TRAFFIC SIGN BROWN TRANSLUCENT INK.

BOTH PROCESSES (A OR B) WILL ACCOMPLISH A DARK FIELD WITH WHITE COPY.



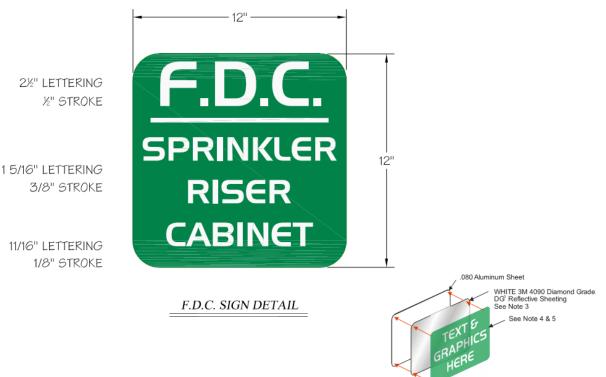

- 1. THE SIGN FACE SHALL BE 12" X 12" AND FABRICATED FROM .080 ALUMINUM SHEET WITH 1½" RADIUS CORNERS.
- 2. FONT STYLE USED IS HANDEL GOTHIC BT CAPITAL FONTS
- 3. THE SIGN FACE SHALL HAVE A WHITE 3M DIAMOND GRADE REFLECTIVE SHEETING (DG³ 4090 SERIES OR EQUIVALENT) APPLIED AS A BACKGROUND TO THE ALUMINUM PLATES.
- 4. LETTERING / GRAPHICS SHALL BE DONE ONE OF THE FOLLOWING WAYS:
 - A. 3M SCOTCHLITE ACRYLIC, TRANSPARENT, ELECTRONIC CUTTABLE FILM, (GREEN 1177 SERIES) INVERSE CUT TO ALLOW WHITE REFLECTIVE BACKGROUND TO SHOW THROUGH.
 - B. SCREEN PRINTED USING 3M 880I OR 880-00 SERIES TRAFFIC SIGN GREEN TRANSLUCENT INK.
 - BOTH PROCESSES (A OR B) WILL ACCOMPLISH A DARK FIELD WITH WHITE COPY.
- 5. ALL SIGN IMAGING SHALL BE IN COMPLIANCE WITH THE REFLECTIVE SHEETING MANUFACTURES MATCH COMPONENT SYSTEM.



2½" LETTERING ½" STROKE


15/6" LETTERING 3/6" STROKE

> 2" LETTERING 3/8" STROKE

1/16 " LETTERING

1/2 " STROKE

Scottsdale Fire Department Fire Protection System Signage

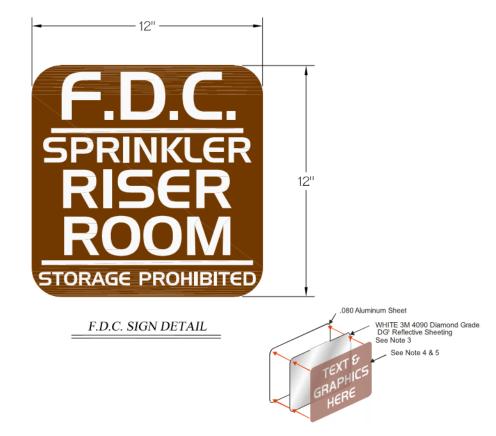


NOTES:

- THE SIGN FACE SHALL BE 12" X 12" AND FABRICATED FROM .080 ALUMINUM SHEET WITH 1½" RADIUS CORNERS.
- FONT STYLE USED IS HANDEL GOTHIC BT CAPITAL FONTS
- THE SIGN FACE SHALL HAVE A WHITE 3M DIAMOND GRADE REFLECTIVE SHEETING (DG³ 4090 SERIES OR EQUIVALENT) APPLIED AS A BACKGROUND TO THE ALUMINUM PLATES.
- 4. LETTERING / GRAPHICS SHALL BE DONE ONE OF THE FOLLOWING WAYS:
 - A. 3M SCOTCHLITE ACRYLIC, TRANSPARENT, ELECTRONIC CUTTABLE FILM, (BROWN 1179 SERIES) INVERSE CUT TO ALLOW WHITE REFLECTIVE BACKGROUND TO SHOW THROUGH.
 - B. SCREEN PRINTED USING 3M 880I OR 880-00 SERIES TRAFFIC SIGN BROWN TRANSLUCENT INK.

BOTH PROCESSES (A OR B) WILL ACCOMPLISH A DARK FIELD WITH WHITE COPY.



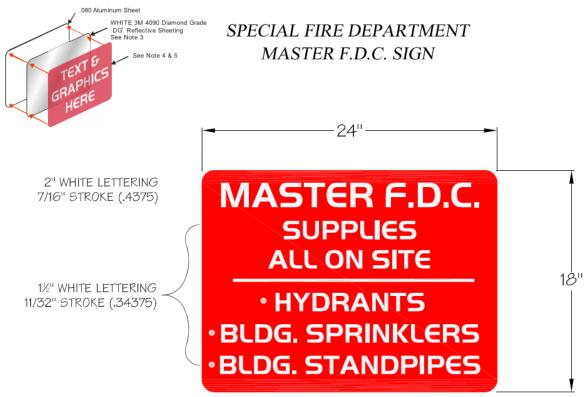


NOTES:

- THE SIGN FACE SHALL BE 24" X 18" AND FABRICATED FROM .080 ALUMINUM SHEET WITH 1½" RADIUS CORNERS.
- 2. FONT STYLE USED IS HANDEL GOTHIC BT CAPITAL FONTS
- 3. THE SIGN FACE SHALL HAVE A WHITE 3M DIAMOND GRADE REFLECTIVE SHEETING (DG3 4090 SERIES OR EQUIVALENT) APPLIED AS A BACKGROUND TO THE ALUMINUM PLATES.
- 4. LETTERING / GRAPHICS SHALL BE DONE ONE OF THE FOLLOWING WAYS:
 - A. 3M SCOTCHLITE ACRYLIC, TRANSPARENT, ELECTRONIC CUTTABLE FILM, (RED 1172 SERIES) INVERSE CUT TO ALLOW WHITE REFLECTIVE BACKGROUND TO SHOW THROUGH.
 - B. SCREEN PRINTED USING 3M 880I OR 880-00 SERIES TRAFFIC SIGN RED TRANSLUCENT INK.

BOTH PROCESSES (A OR B) WILL ACCOMPLISH A RED FIELD WITH WHITE COPY.

- 5. ALL SIGN IMAGING SHALL BE IN COMPLIANCE WITH THE REFLECTIVE SHEETING MANUFACTURES MATCH COMPONENT SYSTEM.
- 6. TO BE INSTALLED ON THE WALL 7 FEET ABOVE GRADE OVER F.D.C. VALVE.




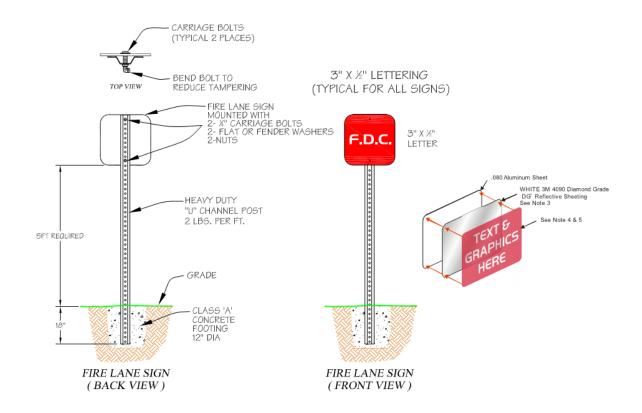

- THE SIGN FACE SHALL BE 12" X12" AND FABRICATED FROM .080 ALUMINUM SHEET WITH 1½" RADIUS CORNERS.
- 2. FONT STYLE USED IS HANDEL GOTHIC BT CAPITAL FONTS
- 3. THE SIGN FACE SHALL HAVE A WHITE 3M DIAMOND GRADE REFLECTIVE SHEETING (DG3 4090 SERIES OR EQUIVALENT) APPLIED AS A BACKGROUND TO THE ALUMINUM PLATES.
- 4. LETTERING SHALL BE DONE ONE OF THE FOLLOWING WAYS:
 - A. 3M SCOTCHLITE ACRYLIC, TRANSPARENT, ELECTRONIC CUTTABLE FILM (RED 1172 SERIES) INVERSE CUT TO ALLOW WHITE REFLECTIVE BACKGROUND TO SHOW THROUGH.
 - B. SCREEN PRINTED USING 3M 880I OR 880-00 SERIES TRAFFIC SIGN RED TRANSLUCENT INK.
 - BOTH PROCESSES (A OR B) WILL ACCOMPLISH A RED FIELD WITH WHITE COPY.
- ALL SIGN IMAGING SHALL BE IN COMPLIANCE WITH THE REFLECTIVE SHEETING MANUFACTURES MATCH COMPONENT SYSTEM.
- TO BE INSTALLED 5 FEET ABOVE GRADE, POST SHALL BE 12" TO 18" FROM BACK OF CURB OR BACK OF SIDEWALK AND MUST FACE THE ONCOMING TRAFFIC.
- 7. REQUIRES PRE-APPROVAL BY FIRE PREVENTION EMERGENCY ACCESS OFFICER.








3" LETTERING

1½" LETTERING

2" LETTERING 1 3/4" (1.75) LETTERING


1½" LETTERING

F.D.C. SIGN




- 1. THE SIGN FACE SHALL BE 18" X18" AND FABRICATED FROM .080 ALUMINUM SHEET WITH 1½" RADIUS CORNERS.
- 2. FONT STYLE USED IS HANDEL GOTHIC BT CAPITAL FONTS
- 3. THE SIGN FACE SHALL HAVE A WHITE 3M DIAMOND GRADE REFLECTIVE SHEETING (DG3 4090 SERIES OR EQUIVALENT) APPLIED AS A BACKGROUND TO THE ALUMINUM PLATES.
- 4. LETTERING / GRAPHICS SHALL BE 3M SCOTCHLITE ACRYLIC, TRANSPARENT, ELECTRONIC CUTTABLE FILM (RED 1172 SERIES) INVERSE CUT TO ALLOW WHITE REFLECTIVE BACKGROUND TO SHOW THROUGH.
- 5. ALL SIGN IMAGING SHALL BE IN COMPLIANCE WITH THE REFLECTIVE SHEETING MANUFACTURES MATCH COMPONENT SYSTEM.




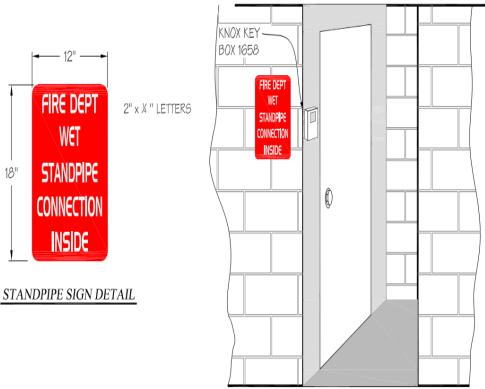

- 1. THE SIGN FACE SHALL BE 12" X18" AND FABRICATED FROM .080 ALUMINUM SHEET WITH 1½" RADIUS CORNERS.
- 2. FONT STYLE USED IS HANDEL GOTHIC BT CAPITAL FONTS
- 3. THE SIGN FACE SHALL HAVE A WHITE 3M DIAMOND GRADE REFLECTIVE SHEETING (DG3 4090 SERIES OR EQUIVALENT) APPLIED AS A BACKGROUND TO THE ALUMINUM PLATES.
- 4. LETTERING / GRAPHICS SHALL BE DONE ONE OF THE FOLLOWING WAYS:
 - A. 3M SCOTCHLITE ACRYLIC, TRANSPARENT, ELECTRONIC CUTTABLE FILM (RED 1172 SERIES) INVERSE CUT TO ALLOW WHITE REFLECTIVE BACKGROUND TO SHOW THROUGH.
- B. SCREEN PRINTED USING 3M 880I OR 880-00 SERIES TRAFFIC SIGN RED TRANSLUCENT INK. BOTH PROCESSES (A OR B) WILL ACCOMPLISH A RED FIELD WITH WHITE COPY.
- ALL SIGN IMAGING SHALL BE IN COMPLIANCE WITH THE REFLECTIVE SHEETING MANUFACTURES MATCH COMPONENT SYSTEM.






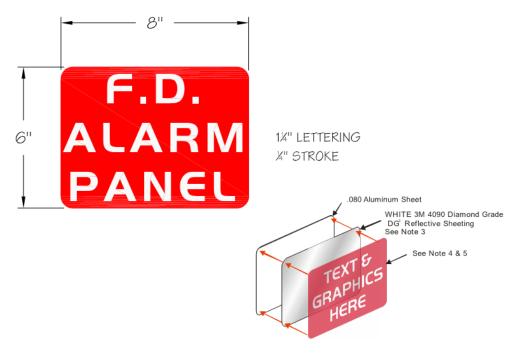

- 1. THE SIGN FACE SHALL BE 8" X 6" AND FABRICATED FROM .080 ALUMINUM SHEET WITH $\mbox{\it \chi}$ " RADIUS CORNERS.
- 2. FONT STYLE USED IS HANDEL GOTHIC BT CAPITAL FONTS, LETTERING IS 1½" X ½" STROKE.
- 3. THE SIGN FACE SHALL HAVE A WHITE 3M DIAMOND GRADE REFLECTIVE SHEETING (DG3 4090 SERIES OR EQUIVALENT) APPLIED AS A BACKGROUND TO THE ALUMINUM PLATES.
- 4. LETTERING SHALL BE DONE ONE OF THE FOLLOWING WAYS:
 - A. 3M SCOTCHLITE ACRYLIC, TRANSPARENT, ELECTRONIC CUTTABLE FILM (RED 1172 SERIES) INVERSE CUT TO ALLOW WHITE REFLECTIVE BACKGROUND TO SHOW THROUGH.
 - B. SCREEN PRINTED USING 3M 880 I OR 880-00 SERIES TRAFFIC SIGN RED TRANSLUCENT INK.
 - BOTH PROCESSES (A OR B) WILL ACCOMPLISH A RED FIELD WITH WHITE COPY.
- 5. ALL SIGN IMAGING SHALL BE IN COMPLIANCE WITH THE REFLECTIVE SHEETING MANUFACTURES MATCH COMPONENT SYSTEM.




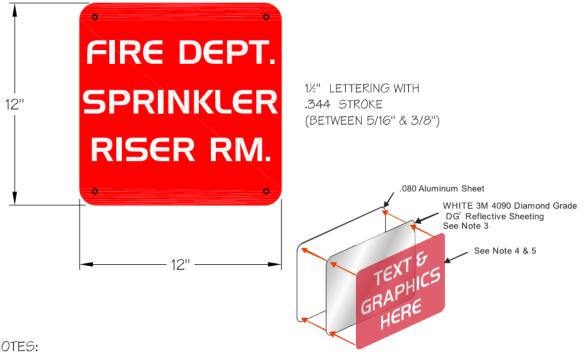

- NOTES:
- 1. THE SIGN FACE SHALL BE 12" X12" AND FABRICATED FROM .080 ALUMINUM SHEET WITH 1½" RADIUS CORNERS.
- 2. FONT STYLE USED IS HANDEL GOTHIC BT CAPITAL FONTS, ADDITIONAL KERNING BETWEEN LETTERS AS SHOWN.
- 3. THE SIGN FACE SHALL HAVE A WHITE 3M DIAMOND GRADE REFLECTIVE SHEETING (DG3 4090 SERIES OR EQUIVALENT) APPLIED AS A BACKGROUND TO THE ALUMINUM PLATES.
- 4. LETTERING SHALL BE DONE ONE OF THE FOLLOWING WAYS:
 - A. 3M SCOTCHLITE ACRYLIC, TRANSPARENT, ELECTRONIC CUTTABLE FILM (RED 1172 SERIES) INVERSE CUT TO ALLOW WHITE REFLECTIVE BACKGROUND TO SHOW THROUGH.
 - B. SCREEN PRINTED USING 3M 880I OR 880-00 SERIES TRAFFIC SIGN RED TRANSLUCENT INK.


BOTH PROCESSES (A OR B) WILL ACCOMPLISH A RED FIELD WITH WHITE COPY.



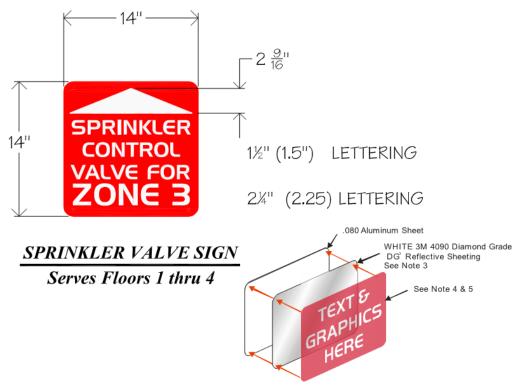

- 1. THE SIGN FACE SHALL BE 14" X14" AND FABRICATED FROM .080 ALUMINUM SHEET WITH 1½" RADIUS CORNERS.
- 2. FONT STYLE USED IS HANDEL GOTHIC BT CAPITAL FONTS. ADDITIONAL KERNING BETWEEN LETTERS AS SHOWN.
- 3. THE SIGN FACE SHALL HAVE A WHITE 3M DIAMOND GRADE REFLECTIVE SHEETING (DG³ 4090 SERIES OR EQUIVALENT) APPLIED AS A BACKGROUND TO THE ALUMINUM PLATES.
- 4. LETTERING SHALL BE DONE ONE OF THE FOLLOWING WAYS:
 - A. 3M SCOTCHLITE ACRYLIC, TRANSPARENT, ELECTRONIC CUTTABLE FILM (RED 1172 SERIES) INVERSE CUT TO ALLOW WHITE REFLECTIVE BACKGROUND TO SHOW THROUGH.
 - B. SCREEN PRINTED USING 3M 880 I OR 880-00 SERIES TRAFFIC SIGN RED TRANSLUCENT INK.
 - BOTH PROCESSES (A OR B) WILL ACCOMPLISH A RED FIELD WITH WHITE COPY.
- 5. ALL SIGN IMAGING SHALL BE IN COMPLIANCE WITH THE REFLECTIVE SHEETING MANUFACTURES MATCH COMPONENT SYSTEM.



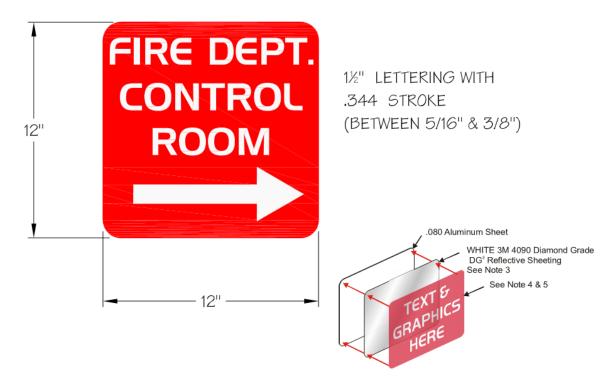


NOTES:

- 1. THE SIGN FACE SHALL BE 12" X 12" AND FABRICATED FROM .080 ALUMINUM SHEET WITH 1½" RADIUS CORNERS.
- 2. FONT STYLE USED IS HANDEL GOTHIC BT CAPITAL FONTS
- 3. THE SIGN FACE SHALL HAVE A WHITE 3M DIAMOND GRADE REFLECTIVE SHEETING (DG3 4090 SERIES OR EQUIVALENT) APPLIED AS A BACKGROUND TO THE ALUMINUM PLATES.
- 4. LETTERING / GRAPHICS SHALL BE DONE ONE OF THE FOLLOWING WAYS:
 - A. 3M SCOTCHLITE ACRYLIC, TRANSPARENT, ELECTRONIC CUTTABLE FILM (RED 1172 SERIES) INVERSE CUT TO ALLOW WHITE REFLECTIVE BACKGROUND TO SHOW THROUGH.
 - B. SCREEN PRINTED USING 3M 880I OR 880-00 SERIES TRAFFIC SIGN RED TRANSLUCENT INK.

BOTH PROCESSES (A OR B) WILL ACCOMPLISH A RED FIELD WITH WHITE COPY.



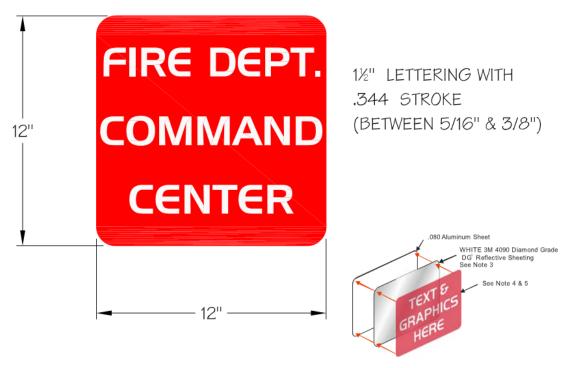

- 1. THE SIGN FACE SHALL BE 12" X12" AND FABRICATED FROM .080 ALUMINUM SHEET WITH 1½" RADIUS CORNERS.
- 2. FONT STYLE USED IS HANDEL GOTHIC BT CAPITAL FONTS
- 3. THE SIGN FACE SHALL HAVE A WHITE 3M DIAMOND GRADE REFLECTIVE SHEETING (DG³ 4090 SERIES OR EQUIVALENT) APPLIED AS A BACKGROUND TO THE ALUMINUM PLATES.
- 4. LETTERING SHALL BE DONE ONE OF THE FOLLOWING WAYS:
 - A. 3M SCOTCHLITE ACRYLIC, TRANSPARENT, ELECTRONIC CUTTABLE FILM (RED 1172 SERIES) INVERSE CUT TO ALLOW WHITE REFLECTIVE BACKGROUND TO SHOW THROUGH.
 - B. SCREEN PRINTED USING 3M 880I OR 880-00 SERIES TRAFFIC SIGN RED TRANSLUCENT INK.
 - BOTH PROCESSES (A OR B) WILL ACCOMPLISH A RED FIELD WITH WHITE COPY.
- 5. ALL SIGN IMAGING SHALL BE IN COMPLIANCE WITH THE REFLECTIVE SHEETING MANUFACTURES MATCH COMPONENT SYSTEM.